

Fire



DATA
SHEET

Conventional Beam Detectors

MBD50R / MBD100R

COOPER

The Cooper loop powered reflective beam detectors are specifically designed to function with all Cooper conventional fire control panels.

Two versions are available, one with a range of up to 50 Metres, the other with a range of 50 – 100 Metres. The units are extremely simple to install and require no separate power supply.

Benefits and Features


- > No power supply required
- > Simple to install
- > Compact
- > Simple to set up
- > 50 and 100 metre range units



Technical Specifications

Model	MBD50R	MBD100R
Description		Reflective beam detector
Standards		EN54: Pt 12 & 17; 2002
CPD approval	0786CPD20323	0786CPD203231
Operating range	5 to 50 metres	50 to 100 metres
Supply voltage		18-30V dc
Quiescent current		(no LED's illuminated) <5 mA
Alarm current		<9 mA
Alignment current		<18 mA
Power up time		approx 10 seconds
Tolerance to beam misalignment at 35%		detector $\pm 0.8^\circ$, Prism $\pm 5.0^\circ$
Fire alarm thresholds		2.50dB (25%) 3.74dB (35%) 6.02dB (50%)
Optical wavelength		880nm
Environmental		-10°C to +55°C
Physical		
Dimensions (W x H x D)		130mm x 210mm x 120mm
Weight		740gm

Wiring Diagram

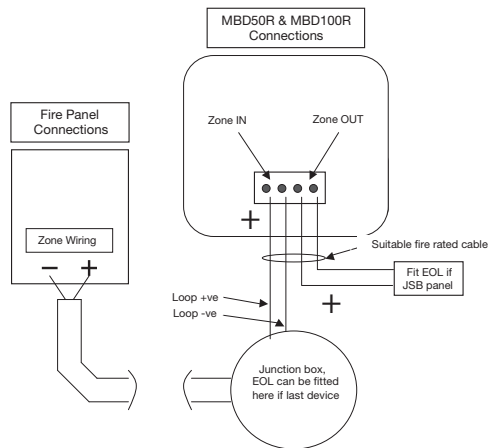

Product Codes

Beam detector 5 to 50 metres	MBD50R
Beam detector 50 to 1000 metres	MBD100R
Accessories	
Wall mount bracket	MRBFP

Cooper Lighting and Safety

Wheatley Hall Road, Doncaster, South Yorkshire DN2 4NB

www.cooperfire.com

Sales

T: +44 (0)1302 303 999
F: +44 (0)1302 303 333
E: sales@cooperfire.com

Technical

T: +44 (0)1302 303 350
F: +44 (0)1302 303 332
E: techsupport@cooperfire.com

Export

T: +44 (0)1302 303 344
F: +44 (0)1302 303 345
E: export@cooperfire.com